


1034 STM-4820 Battery Charger



Model / Spec	STM 4820
Input Voltage	220v ~ 240v (1 phase 50hz)
No of Battery	4 x 12v
Charging Current	Max 20A (Selectable)
Safety Protection	Input Fuse 8A, Output MCB 25A
Dimension (W x D x H)	340mm x 330mm x 300mm
Weight	22.0kg

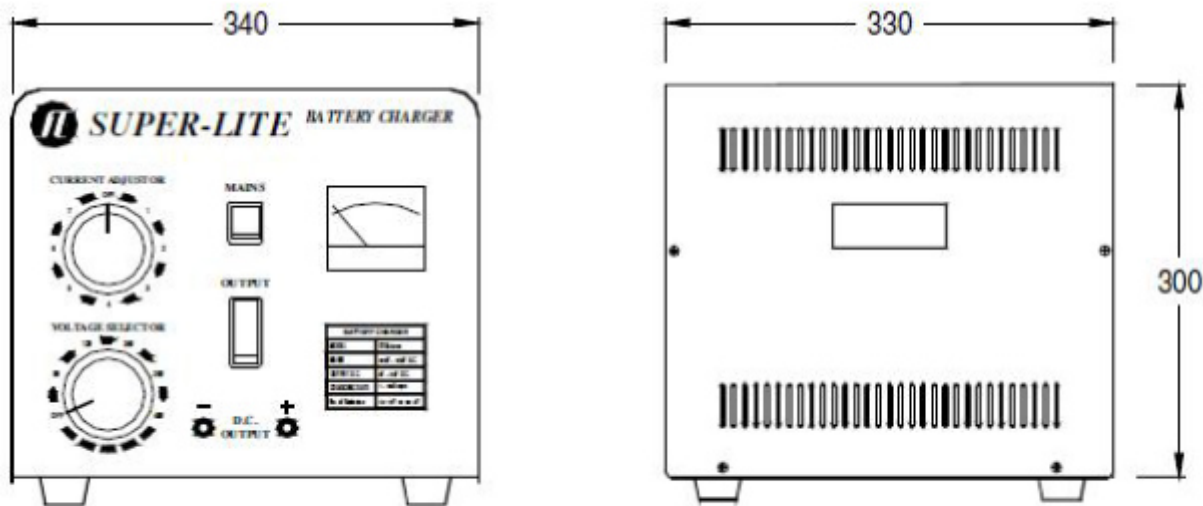

STM 4820