
HAND PUMPS



- All models are featured with their rugged construction and low handle efforts.
- All metal construction and hand size release knobs that antileaking mechanism are truly suitable to industrial requirement and your daily works.
- Both single and two speed models are available.
- Internal overload valve prevents pump from being used beyonds its rated capacity.
- External adjustable relief valve with anti-loosing mechanism design.

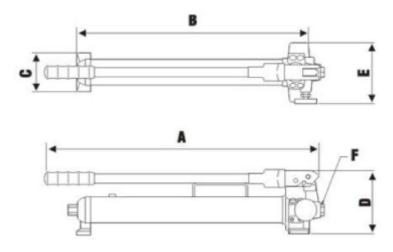

Item No	Model	Pressure Rating		Oil	Oil Volumn (per Stroke)		^	В	С	D		Oil	Weinhi
		1st Stage	2nd Stage	Capacity (c.c)	1st Stage	2nd Stage	A (mm)	B (mm)	(mm)	(mm)	E (mm)	Port Thread	Weight (kg)
2065	HB350	13.8	700	350	13	2.8	343	310	66	146	142	3/8" NPT	5.90
2066	HB600	13.8	700	600	13	2.8	543	480	90	146	142	3/8" NPT	7.60
2067	HB700	13.8	700	700	13	2.8	633	528	90	146	142	3/8" NPT	8.00
2068	HC1500	13.8	700	1500	13	2.8	633	551	106	200	142	3/8" NPT	11.20
2069	HC2500	13.8	700	2500	13	2.8	713	632	106	200	142	3/8" NPT	12.00
2070	HE2000	13.8	700	2000	13	2.8	580	526	140	189	142	3/8" NPT	11.50
2071	HF350	13.8	700	350	7	1	343	310	66	127	142	3/8" NPT	5.50
2072	HA350	700	•	350	3.2	•	343	292	90	146	142	3/8" NPT	5.70
2073	HA600	700	•	600	3.2		543	478	90	146	142	3/8" NPT	7.10
2074	HA700	700		700	3.2	•	633	526	90	146	142	3/8" NPT	7.60
2075	HD300	700	-	300	2.8		330	283	90	127	142	1/4" NPT	4.40
2076	HD500	700	-	500	2.8	•	530	469	90	127	130	1/4" NPT	5.40