


Nitto PM Type Coupler

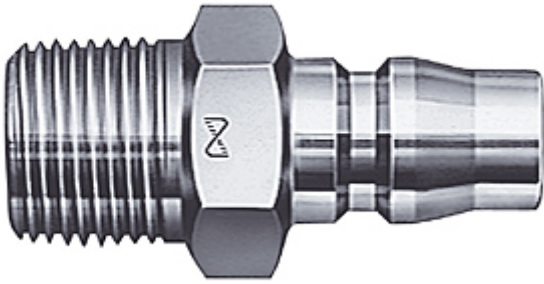

- An excellent general purpose coupling for connecting factory air supply to pneumatic tools
- Steel coupling is suitable for air.
- Brass or or stainless steel is suitable for water.
- Note: Fluid will come out from the plug when disconnected.
- Critical structural parts of steel models are heat-treated for increased strength giving greater durability and resistance to wear.
- Available in various body materials, sizes and end configurations applicable to a wide range of applications.
- Specification:
 - Max working pressure: 1.5MPa (15kgf/cm²)
 - Working temperature: -20°C to -80°C
 - Seal Material: NBR
- Made In JAPAN